


VXT Multi



DIMENSIONS Cargo Box

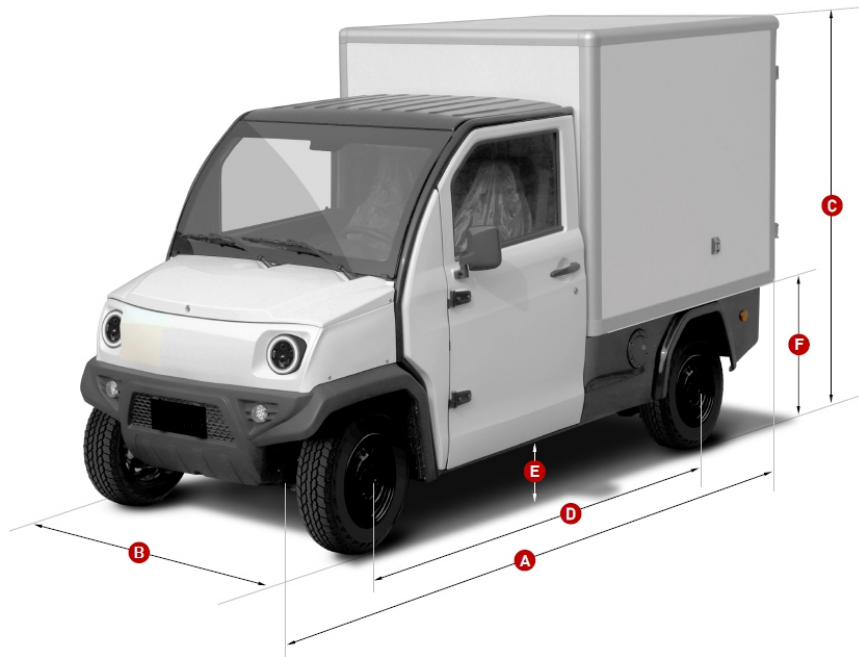

BODY DIMENSIONS

A Length	3700 mm
B Width	1440 mm
B Width (incl. Mirror)	1735 mm
C Height	2100 mm
D Wheelbase	2495 mm
E Ground Clearance	160 mm
F Cargo Bed Height	700 mm




VXT Multi

DIMENSIONS Pickup Steel Tray



IONA XS BODY DIMENSIONS

A	Length	3700 mm
B	Width	1440 mm
B	Width (incl. Mirror)	1735 mm
C	Height	1750 mm
D	Wheelbase	2495 mm
E	Ground Clearance	160 mm
F	Cargo Bed Height	700 mm

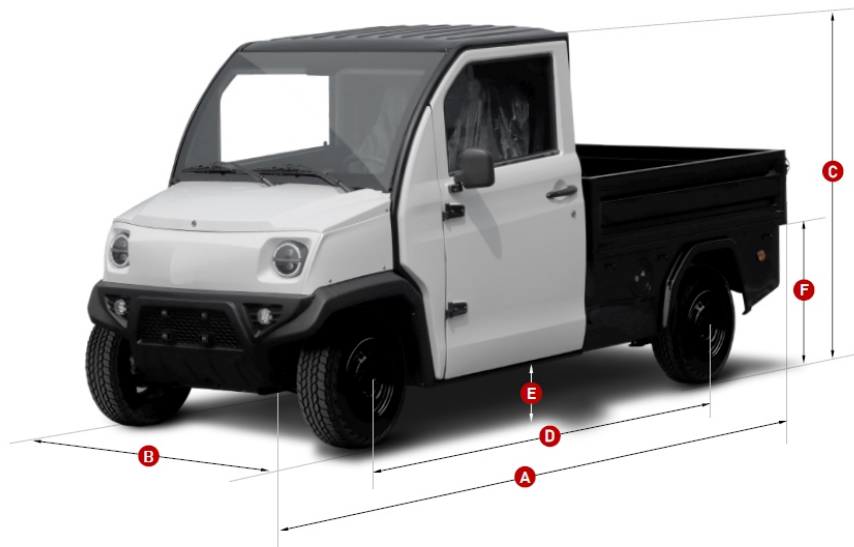

VXT Multi

DIMENSIONS **Tipper** Alloy Tray



IONA XS BODY DIMENSIONS


A	Length	3700 mm
B	Width	1440 mm
B	Width (incl. Mirror)	1735 mm
C	Height	1800 mm
D	Wheelbase	2495 mm
E	Ground Clearance	160 mm
F	Cargo Bed Height	700 mm



VXT Multi

DIMENSIONS Pickup Steel Tray

Effortlessly fits two Euro pallets

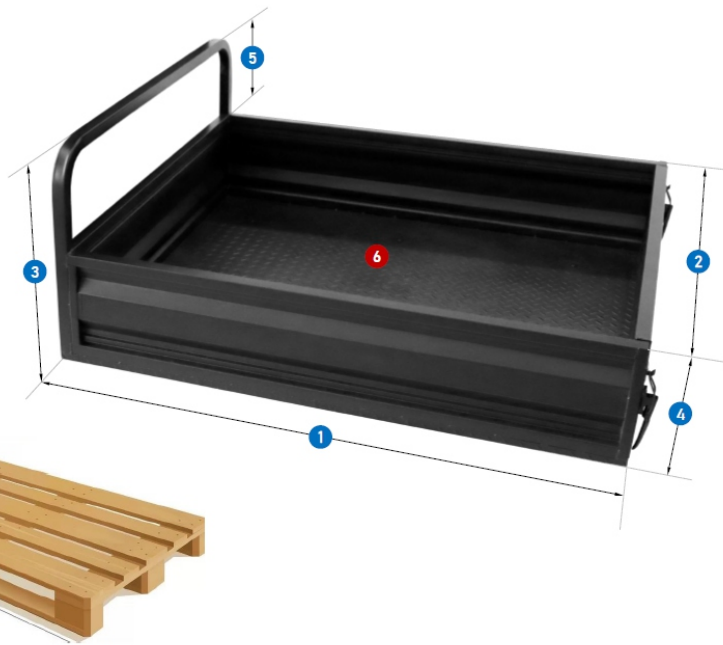

PICKUP TRAY DIMENSIONS

1	Length Outside	1685 mm
	Length Inside	1580 mm
2	Width Outside	1515 mm
	Width Inside	1367 mm
3	Height Total	660 mm
4	Height	330 mm
5	Height Headboard	330 mm
6	Payload Area	2.2 m ²

VXT Multi

DIMENSIONS **Tipper** Alloy Tray



IONA XS BODY DIMENSIONS

A	Length	3700 mm
B	Width	1440 mm
B	Width (incl. Mirror)	1735 mm
C	Height	1800 mm
D	Wheelbase	2495 mm
E	Ground Clearance	160 mm
F	Cargo Bed Height	700 mm



VXT Multi

HIGHLIGHTS

20 kW

Peak power

75 km/h

Top speed (km/h)

4-5 hours

Charging time (20-80%)

EU Type2

Charger standard

200+ km

Real world range

500 kg

Payload capacity

23 kWh

Battery pack capacity


3.3 kW

On-Board Charger




The range will greatly vary depending on the individual driving/charging habits, driving speed, road/traffic conditions and weather. Due to rounding, numbers presented throughout this brochure may not add up precisely to the totals provided and percentages may not precisely reflect the absolute figures.


VXT Multi CONFIGURATIONS




Flatbed



Pickup




Tipper




Cargo Box




Refrigerated Box




Cargo Box with roller shutter door *




Cargo Box with side door *




Cargo Box with tarpaulin cover *



Small Cargo Box *



Small Cargo Box with side door *



Small Cargo Box with roof rack *




Waste Collection *



Cargo Box with tarpaulin cover *



Mobile Coffee shop *




Mobile Advertisement Screen *

* Available on a build-to-order basis and are offered upon request only.


Technical specifications and data are valid at the time of publishing. The product images shown are for illustrative purposes only. Specifications are subject to change without prior notice. Electric tipper is with hand operated controller.

WARRANTY



BATTERY

4 years or 200,000 km
(whichever comes first)



VEHICLE


3 years or 50,000 km
(whichever comes first)

BATTERY



SINGLE PACK

Capacity: 11.52 kWh
(150Ah / 76.8V)



DOUBLE PACK

Capacity: 23.04 kWh
(300Ah / 76.8V)

For current warranty conditions and details consult with your local dealer and/or distributor.

CERTIFICATES



AVAILABLE IN...



RIGHT-HAND DRIVE



LEFT-HAND DRIVE

ISO14001-2015 / ISO9001-2015 / ISO9001-2015 / GB/T19001-2016 / EUWVTA

VXT Multi SPECIFICATIONS (L7e-CU)

● available | — not available | ○ optional

MAIN SPECIFICATIONS	Cargo Box	Refrigerated Box	Flatbed	Pickup	Tipper
Dimensions L × W × H (incl. mirror 1735 mm)	3700 × 1440 × 2100 mm	3700 × 1440 × 2100 mm	3600 × 1440 × 1750 mm	3700 × 1440 × 1800 mm	3700 × 1440 × 1800 mm
Driving range per WVTA (23 kWh / 11.52 kWh)	260 km / 130 km	240 km / —	260 km / 130 km	260 km / 130 km	260 km / 130 km
Track (Front/Rear)	1145 / 1195 mm	1145 / 1195 mm	1145 / 1195 mm	1145 / 1195 mm	1145 / 1195 mm
Ramp angles (Front/Rear)	48° / 30°	48° / 30°	48° / 30°	48° / 30°	48° / 30°
Battery pack options	23.04 kWh / 11.52 kWh	23.04 kWh / —	23.04 kWh / 11.52 kWh	23.04 kWh / 11.52 kWh	23.04 kWh / 11.52 kWh
Min. ground clearance 160 mm	●	●	●	●	●
Gross Vehicle Weight 1450 kg	●	●	●	●	●
Curb weight (23 kWh / 11.52 kWh)	845 kg / 760 kg	930 kg / —	850 kg / 760 kg	850 kg / 770 kg	850 kg / 770 kg
Top speed 75 km/h	●	●	●	●	●
Gradeability 25% (14.0°)	●	●	●	●	●
Wheels (23 kWh / 11.52 kWh)	Alloy / Steel	Alloy / Steel	Alloy / Steel	Alloy / Steel	Alloy / Steel
AC slow charging	●	●	●	●	●
Charger EU Type 2	●	●	●	●	●
On-board charger (OBC)	3.3 kW / 2.2 kW	3.3 kW / —	3.3 kW / 2.2 kW	3.3 kW / 2.2 kW	3.3 kW / 2.2 kW
Charging time (20-80%)	≈ 5 / 4 h	≈ 5 h / —	≈ 5 / 4 h	≈ 5 / 4 h	≈ 5 / 4 h
Charging time (0-100%)	≈ 9 / 7 h	≈ 9 h / —	≈ 9 / 7 h	≈ 9 / 7 h	≈ 9 / 7 h
Permanent Magnet Synchronous Motor	●	●	●	●	●
Peak power 20 kW / 27 hp	●	●	●	●	●
Peak torque 112 N.m	●	●	●	●	●
Rear-wheel drive	●	●	●	●	●
Regenerative braking system	●	●	●	●	●
Suspension Front / Rear	McPherson / Leaf Spring	McPherson / Leaf Spring	McPherson / Leaf Spring	McPherson / Leaf Spring	McPherson / Leaf Spring
Brakes Front/Rear	Disc / Drum	Disc / Drum	Disc / Drum	Disc / Drum	Disc / Drum
Tire 155R13C (LT)	●	●	●	●	●
Hand Brake	●	●	●	●	●
Wheelbase 2500 mm	●	●	●	●	●
Minimum turning radius 5500 mm	●	●	●	●	●

The battery pack capacity may/will degrade over time and usage. The actual driving range will vary depending on driving behaviors, charging intervals, driving speed, cargo load weight and weather conditions.

The figures shown are for comparability purposes; only compare with other vehicles tested to the same technical procedures and similar vehicle weight class. The charging times are estimates. Charging stations must be Type 2 compatible. The permissible total cargo weight must not exceed. Technical specifications and data are valid at the time of publishing.

The product images shown are for illustrative purposes only. Specifications are subject to change without prior notice.

VXT Multi SPECIFICATIONS (L7e-CU)

● available | — not available | ○ optional

	Cargo Box	Refrigerated Box	Flatbed	Pickup	Tipper
CARGO PLATFORM					
Cargo volume	3 m ³	2.8 m ³	2.3 m ²	2.2 m ²	2.2 m ²
Cargo payload	500 kg / 590 kg	380 kg / —	500 kg / 590 kg	500 kg / 580 kg	500 kg / 580 kg
SAFETY FEATURES					
ADAS Anti-lock Braking System ABS	●	●	●	●	●
Electric Power Steering EPS	●	●	●	●	●
Driver Seat Belt Alarm	●	●	●	●	●
Rear View Camera	●	●	●	●	●
Door Ajar Alarm	●	●	●	●	●
Reversing Warning Alarm	●	●	●	●	●
Acoustic Vehicle Alerting Systems	●	●	●	●	●
3-Point Safety Belt (retractable)	●	●	●	●	●
LIGHTING SYSTEM					
Front combination light LED	●	●	●	●	●
Combination Tail light LED	●	●	●	●	●
Daytime running light LED	●	●	●	●	●
Interior lighting LED	●	●	●	●	●
ACCESSORIES & OTHERS					
Intermittent windshield wipers	●	●	●	●	●
Imitation leather seat cover	●	●	●	●	●
4-Way adjustable Seats (manual)	●	●	●	●	●
Heating	●	●	●	●	●
Central door locking system	●	●	●	●	●
OBD connection	●	●	●	●	●
9" LCD Infotainment display	●	●	●	●	●

The battery pack capacity may/will degrade over time and usage. The actual driving range will vary depending on driving behaviors, charging intervals, driving speed, cargo load weight and weather conditions.

The figures shown are for comparability purposes; only compare with other vehicles tested to the same technical procedures and similar vehicle weight class. The charging times are estimates. Charging stations must be Type 2 compatible. The permissible total cargo weight must not exceed. Technical specifications and data are valid at the time of publishing.

The product images shown are for illustrative purposes only. Specifications are subject to change without prior notice.

VXT Multi SPECIFICATIONS (L7e-CU)

● available | — not available | ○ optional

	Cargo Box	Refrigerated Box	Flatbed	Pickup	Tipper
ACCESSORIES & OTHERS					
Bluetooth connectivity	●	●	●	●	●
Loudspeakers x 2	●	●	●	●	●
USB port x 1	●	●	●	●	●
Key FOB / Keyless Entry	●	●	●	●	●
Push-Start button	●	●	●	●	●
Door storage box	●	●	●	●	●
Sun visor (flip) x 2	●	●	●	●	●
Radio, MP3, MP4	●	●	●	●	●
Portable EU Type2 charger (220V)	●	●	●	●	●
Foldable warning triangle & safety vest	●	●	●	●	●
OPTIONS					
Air condition	○	○	○	○	○
On-board charger 3.3 kW and 7 kW	○	○	○	○	○
Towing Hook	○	○	○	○	○
Tools kit	○	○	○	○	○
Wall Charger 7.4 kW	○	○	○	○	○
Spare tire	○	○	○	○	○
4 x Winter tires	○	○	○	○	○
Alloy Wheel	- / ○	- / ○	- / ○	- / ○	- / ○
PAINT OPTIONS					
○ White (standard)	●	●	●	●	●
● Yellow	○	○	○	○	○
● Black	○	○	○	○	○
● Light Grey	○	○	○	○	○
● Light Green	○	○	○	○	○
● Light Blue	○	○	○	○	○
● Custom Color (On Request)	○	○	○	○	○

The battery pack capacity may/will degrade over time and usage. The actual driving range will vary depending on driving behaviors, charging intervals, driving speed, cargo load weight and weather conditions.

The figures shown are for comparability purposes; only compare with other vehicles tested to the same technical procedures and similar vehicle weight class. The charging times are estimates. Charging stations must be Type 2 compatible. The permissible total cargo weight must not exceed. Technical specifications and data are valid at the time of publishing.

The product images shown are for illustrative purposes only. Specifications are subject to change without prior notice.